


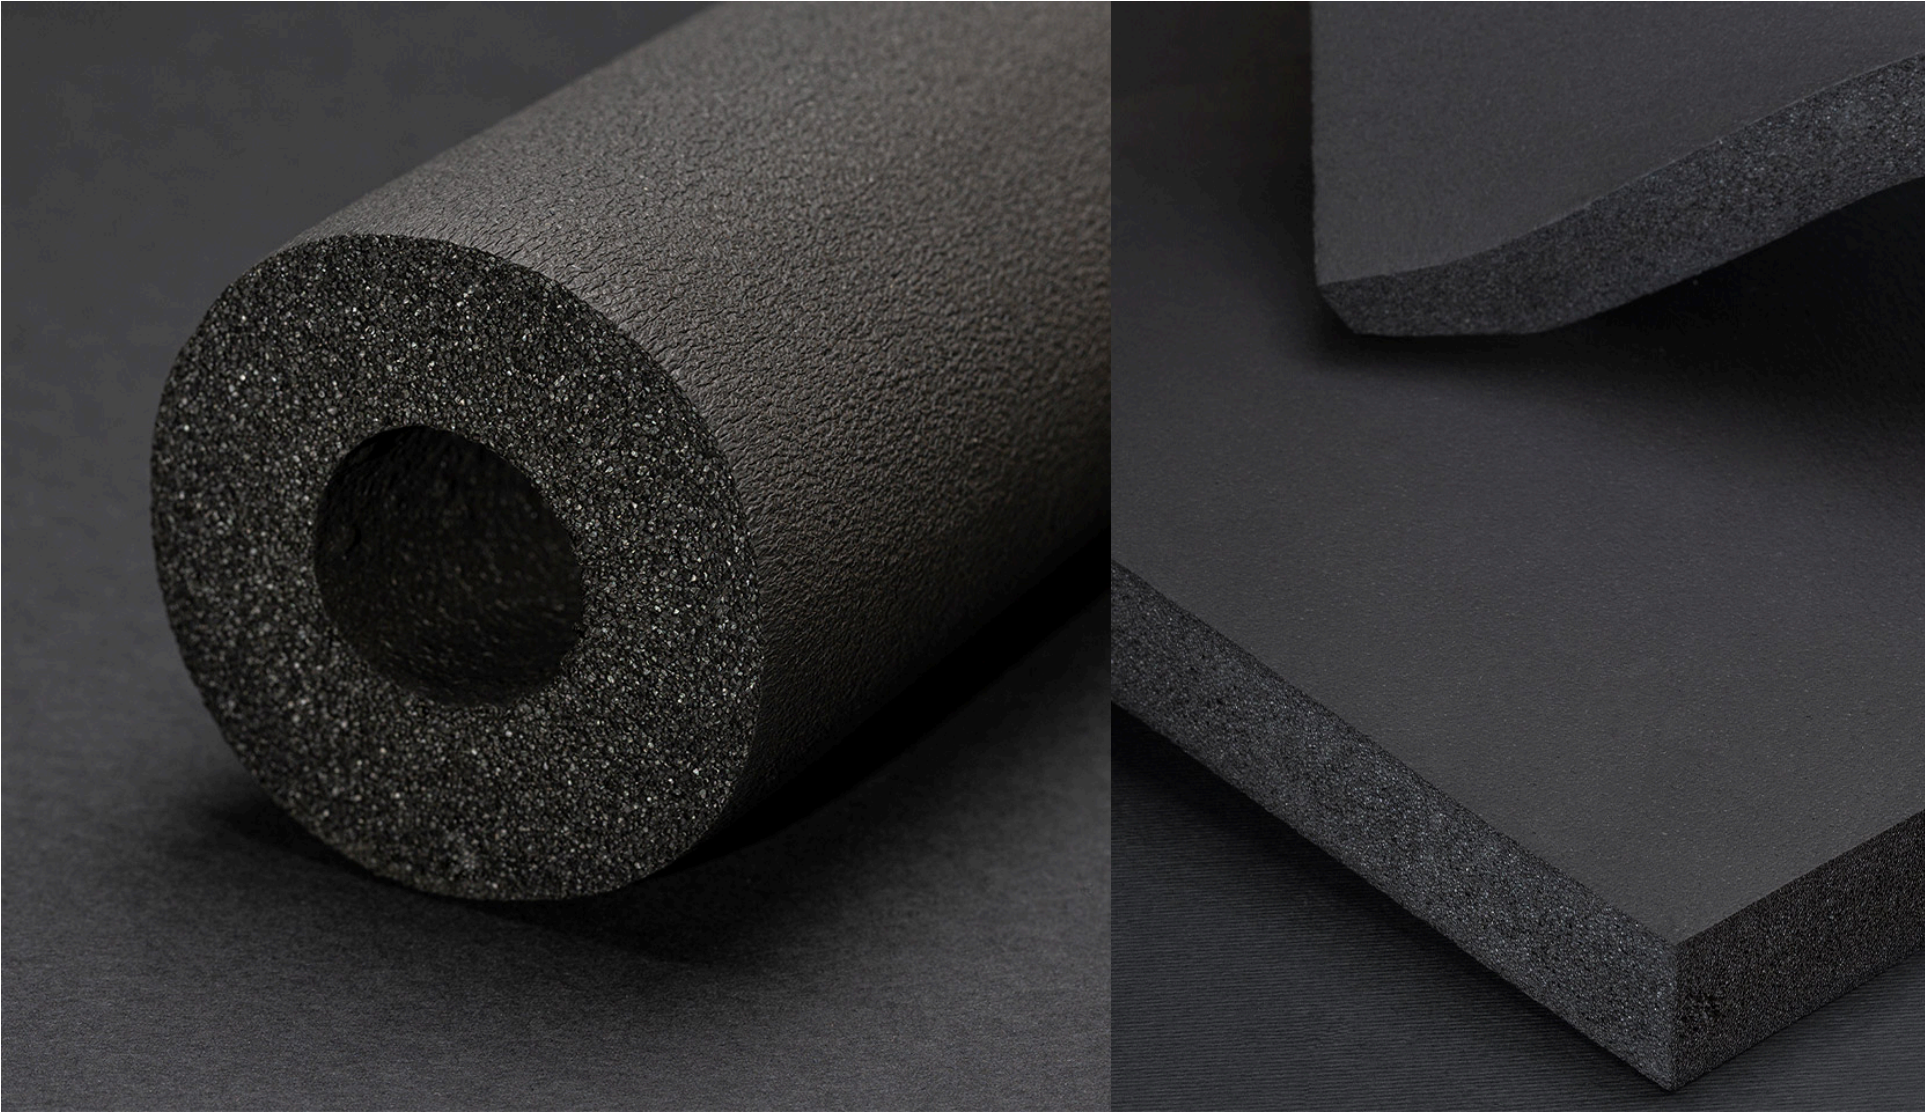

K-FLEX SOLAR HT

The perfect solution for solar panels and industrial processes up to150°C. Revolutionary new packaging, tailor-made for the client, with practical and economical advantages for use and distribution.

TECHNICAL SPECIFICATIONS

TEMPERATURE RANGE

K-FLEX SOLAR HT pipe: from -40 °C to +150 °C
K-FLEX SOLAR HT sheet: from -40 °C to +150 °C

THERMAL CONDUCTIVITY λ W/(m•K)

Thickness $\leq$ 25mm

0 °C = 0,040
+40 °C = 0,044

Thickness $>$ 25mm

0 °C = 0,040
+40 °C = 0,044

CORROSION PREVENTION

pH neutral (7)

FIRE RATING

K-FLEX SOLAR HT pipe: Euroclass E
K-FLEX SOLAR HT sheet: Euroclass E

CONTACT US FOR MORE INFORMATION ABOUT THIS PRODUCT